

SPM-634

 SINGLE WIRE
COMMUNICATION

SOLID STATE POWER MODULE

Features:




- 4 x 40 A @ 24-240 VAC Switching Output (adequate heatsink required depending on the current)
- 4 x Status LED's
- Wire Range: 20-6 AWG
- Operating Temperature: 0-75°C (32-167°F)

Benefits:

- Durable and reliable
- Simple, inexpensive installation
- Small footprint requires minimal space
- Fully-encapsulated for maximum environmental protection
- Low power consumption
- Easily upgradeable and scaleable to meet specific needs

Wide Range of Applications:

- Ideal for commercial foodservice equipment such as ovens, food warming/ holding cabinets, fryers, refrigeration equipment, steamers, industrial machines, and more.

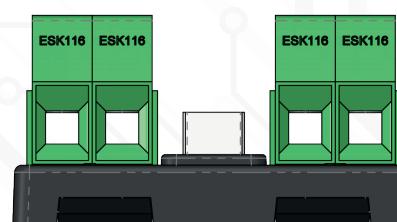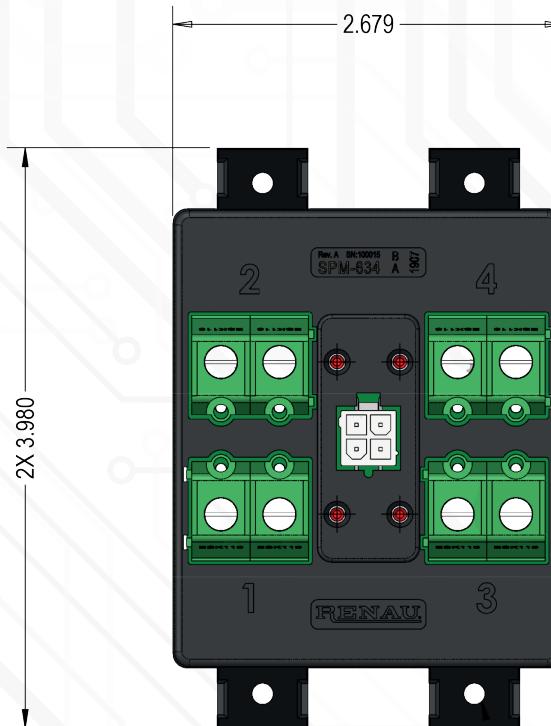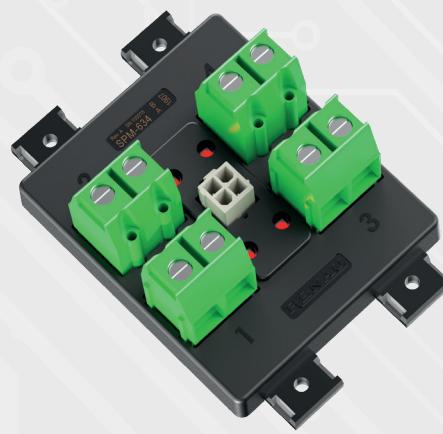

Dimensions:

- 2.679" W x 3.98" H x 1.394" D

Warranty:

- Every Renau product is thoroughly tested at numerous stages of production and comes with an extended three (3) year warranty.



We do more than design. We invent.

RENAU[®]

9309 Deering Ave. Chatsworth, CA 91311 USA

Tel: 818.341.1994 ext. 349
Fax: (818) 341-8063
info@renau.com
www.renau.com

Specifications are subject to change without notice. The products manufactured by RENAU are protected under one or more of the following U.S. Patents: 6,850,850 6,816,670 6,636,772 6,546,944 6,214,239 5,835,993 4,943,706 4,849,098 and other patents pending. Designed and manufactured in the U.S.A.